

Features

- Complementary NPN Type available (2N2907A)


Package Marking and Ordering Information

Product ID	Pack	Marking	Qty(PCS)
2N2222A	TO-92(TO-92-3)	2N2222A	1000



1. EMITTER
2. BASE
3. COLLECTOR

TO-92
(TO-92-3)



Maxmim Ratings (Ta=25 unless otherwise noted)







Symbol	Parameter	Value	Unit
V _{CB0}	Collector-Base Voltage	75	V
V _{CE0}	Collector-Emitter Voltage	40	V
V _{EB0}	Emitter-Base Voltage	6	V
I _C	Collector Current -Continuous	0.6	A
P _D	Collector Power Dissipation	625	mW
R _{θJA}	Thermal Resistance from Junction to Ambient	200	°C /W
T _J , T _{stg}	Operation Junction and Storage Temperature Range	-55 ~ +150	°C



Electrcal Characteristics (Ta=25 unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Max	Unit
Collector-base breakdown voltage	V _{(BR)CB0}	I _C = 10uA , I _E =0	75		V
Collector-emitter breakdown voltage	V _{(BR)CE0}	I _C = 10mA , I _B =0	40		V
Emitter-base breakdown voltage	V _{(BR)EBO}	I _E = 10uA, I _C =0	6		V
Collector cut-off current	I _{CB0}	V _{CB} = 60V, I _E =0		10	nA
Collector cut-off current	I _{CEX}	V _{CE} = 60V, V _{EB(off)} =3V		10	nA
Emitter cut-off current	I _{EBO}	V _{EB} = 3 V, I _C =0		100	nA
DC current gain	h _{FE(1)}	V _{CE} =10V, I _C = 150mA	100	300	
	h _{FE(2)}	V _{CE} =10V, I _C = 0.1mA	40		
	h _{FE(3)} *	V _{CE} =10V, I _C = 500mA	42		
Collector-emitter saturation voltage	V _{CE(sat)(1)} *	I _C = 500mA, I _B =50mA		0.6	V
	V _{CE(sat)(2)} *	I _C = 150mA, I _B =15mA		0.3	V
Base-emitter saturation voltage	V _{BE(sat)} *	I _C = 500mA, I _B = 50mA		1.2	V
Delay time	t _d	V _{CC} =30V, V _{EB(off)} =-0.5V,		10	nS
Rise time	t _r	I _C =150mA, I _{B1} =15mA		25	nS
Storage time	t _s	V _{CC} =30V, I _C =150mA, I _{B1} =I _{B2} =15mA		225	nS
Fall time	t _f			60	nS
Transition frequency	f _T	V _{CE} =20V, I _C =20mA, f=100MHz	300		MHz



* pulse test

Typical Characteristics

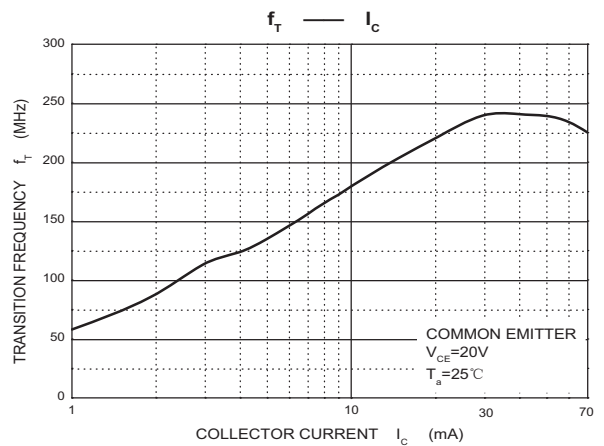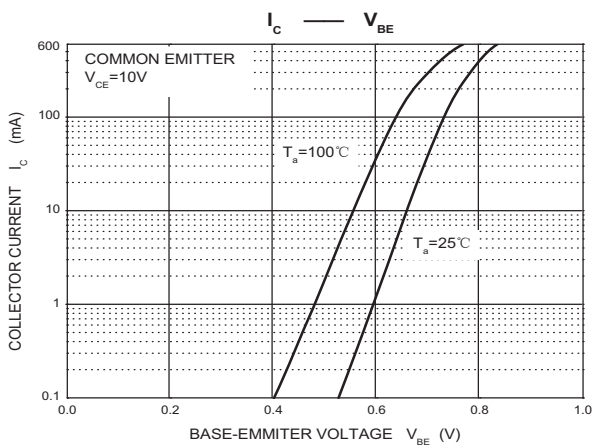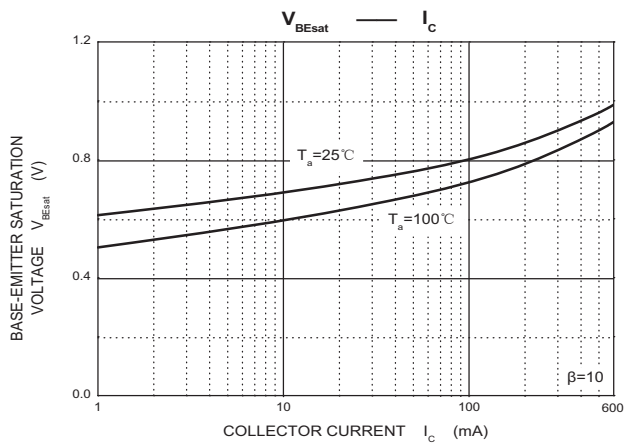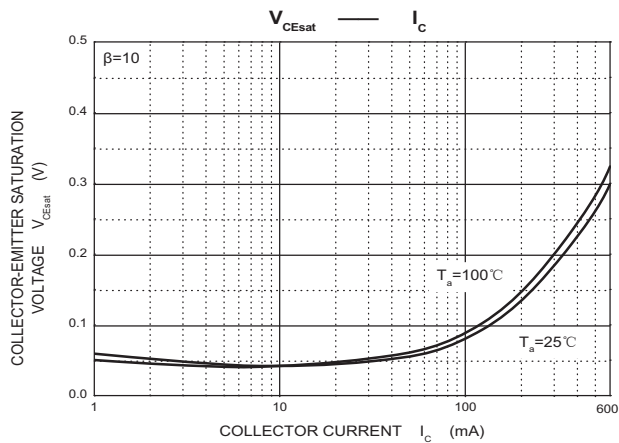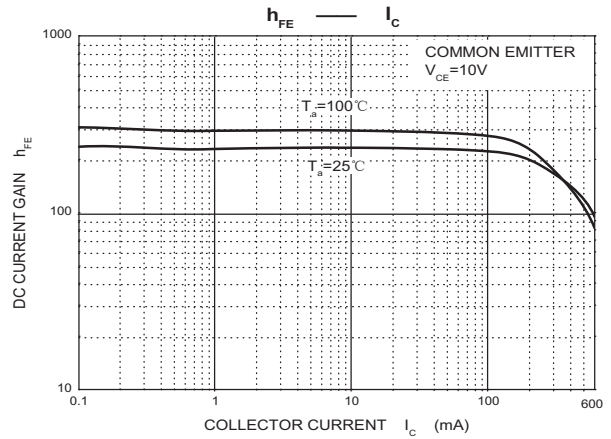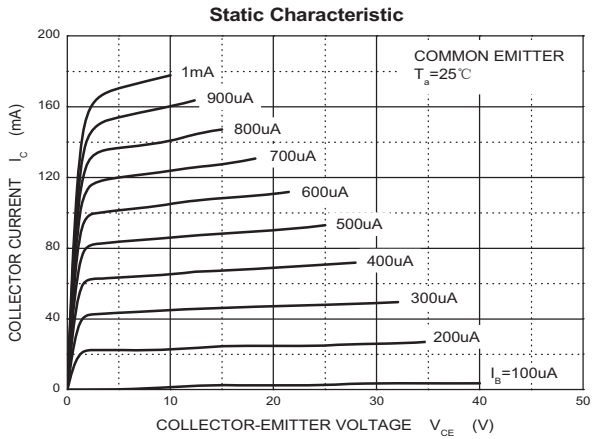

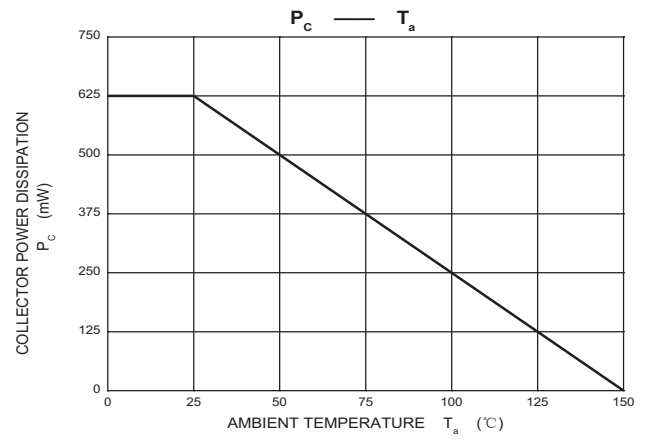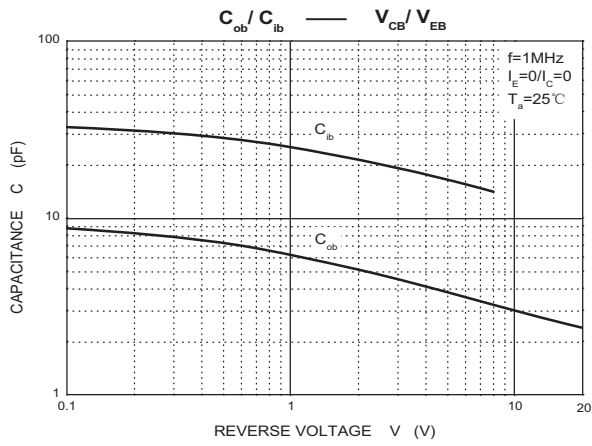

TO-92(TO-92-3) Package Outline Dimensions

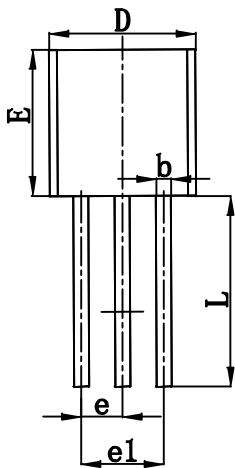

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	3.300	3.700	0.130	0.146
A1	1.100	1.400	0.043	0.055
b	0.380	0.550	0.015	0.022
c	0.360	0.510	0.014	0.020
D	4.300	4.700	0.169	0.185
D1	3.430		0.135	
E	4.300	4.700	0.169	0.185
e	1.270 TYP		0.050 TYP	
e1	2.440	2.640	0.096	0.104
L	14.100	14.500	0.555	0.571
Φ		1.600		0.063
h	0.000	0.380	0.000	0.015

Disclaimer

The information presented in this document is for reference only. Shenzhen Jingteng Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Shenzhen Jingteng Technology Co., Ltd. or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.